

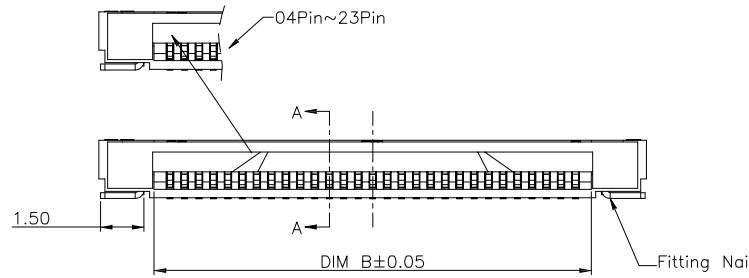
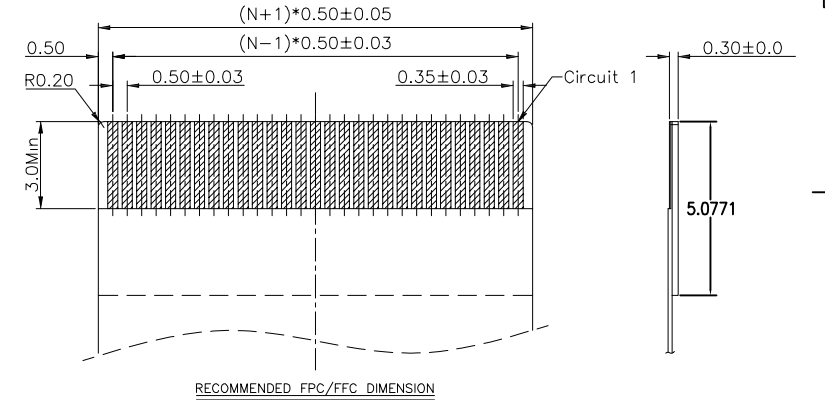



RoHS compliant

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

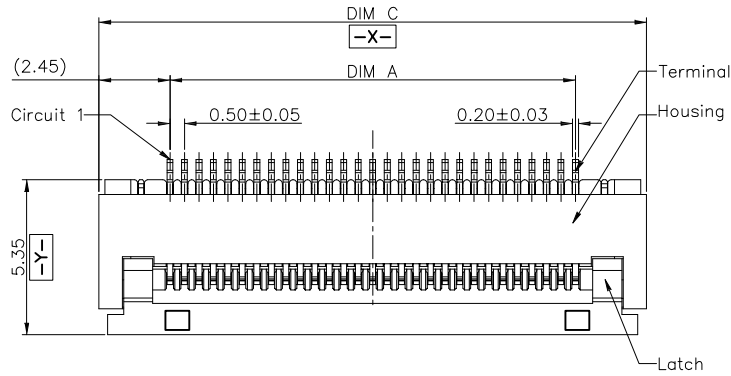

NOTES:

- MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR:NA
COVER: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR:BLA
CONTACT: COPPER ALLOY;
LEG: COPPER ALLOY;
- PLATING:
CONTACT: GOLD OR TIN PLATED ON NICKEL OVERA
LEG: TIN PLATED ON NICKEL OVERALL.
- RATING:
CURRENT RATING: 0.5A AC/DC
VOLTAGE RATING: 50V AC/DC
TEMPERATURE RANGE: -25°C~+85°C;

conectonic

TOLERANCE:	PROJECTON		TITLE:
Angles ±3°	DATE	06-22-15'	FPC 0.5Pitch H=2.00mm Horizontal, Lower Contact
X.X ±0.30	DRAWN	LZH	PART NO:
X.XX ±0.20	CHECKED		ISF3853F-AAA-33UB
X.XXX ±0.10	APPROVED		REV: UNIT: SCALE: SIZE:
			A mm 2:1 A4

QTY	DIM C	DIM B	DIM A
4	6.40	2.60	1.50
5	6.90	3.10	2.00
6	7.40	3.60	2.50
7	7.90	4.10	3.00
8	8.40	4.60	3.50
9	8.90	5.10	4.00
10	9.40	5.60	4.50
11	9.90	6.10	5.00
12	10.40	6.60	5.50
13	10.90	7.10	6.00
14	11.40	7.60	6.50
15	11.90	8.10	7.00
16	12.40	8.60	7.50
17	12.90	9.10	8.00
18	13.40	9.60	8.50
19	13.90	10.10	9.00
20	14.40	10.60	9.50
21	14.90	11.10	10.00
22	15.40	11.60	10.50
23	15.90	12.10	11.00
24	16.40	12.60	11.50
25	16.90	13.10	12.00
26	17.40	13.60	12.50
27	17.90	14.10	13.00
28	18.40	14.60	13.50
29	18.90	15.10	14.00
30	19.40	15.60	14.50
31	19.90	16.10	15.00
32	20.40	16.60	15.50
33	20.90	17.10	16.00
34	21.40	17.60	16.50
35	21.90	18.10	17.00
36	22.40	18.60	17.50
37	22.90	19.10	18.00
38	23.40	19.60	18.50
39	23.90	20.10	19.00
40	24.40	20.60	19.50
41	24.90	21.10	20.00
42	25.40	21.60	20.50
43	25.90	22.10	21.00
44	26.40	22.60	21.50
45	26.90	23.10	22.00
46	27.40	23.60	22.50
47	27.90	24.10	23.00
48	28.40	24.60	23.50
49	28.90	25.10	24.00
50	29.40	25.60	24.50
51	29.90	26.10	25.00
52	30.40	26.60	25.50
53	30.90	27.10	26.00
54	31.40	27.60	26.50
55	31.90	28.10	27.00
56	32.40	28.60	27.50
57	32.90	29.10	28.00
58	33.40	29.60	28.50
59	33.90	30.10	29.00
60	34.40	30.60	29.50

RoHS compliant

REVISION DATA

SYM	ECN	DESCRIPTION	DATE	APPROVED

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE. $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: XXXXX ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.35 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 24.60METERS.
7. COMPONENT LOAD PER 13" REEL : 2000PCS.
8. PEELING OFF FORCE OF TOP TAPE $0.1\text{N} \sim 0.7\text{N}$ ($10.2\text{gf} \sim 71.4\text{gf}$)

GKTS	B0±0.10	W	W1	F	S0±0.10
04	6.70	16+0.3/-0	16.4	7.5±0.10	one side hole
05	7.20				
06	7.70				
07	8.20				
08	8.70				
09	9.20	24+0.3/-0	24.4	11.5±0.10	
10	9.70				
11	10.20				
12	10.70				
13	11.20				
14	11.70				
15	12.20				
16	12.70				
17	13.20				
18	13.70				
19	14.20	32±0.30	32.4	14.2±0.10	
20	14.70				
21	15.20				
22	15.70				
23	16.20				
24	16.70				
25	17.20				
26	17.70				
27	18.20				
28	18.70				
29	19.20	44±0.30	44.4	20.2±0.15	
30	19.70				
31	20.20				
32	20.70				
33	21.20				
34	21.70				
35	22.20				
36	22.70				
37	23.20				
38	23.70				
39	24.20	56±0.30	56.4	26.2±0.15	
40	24.70				
41	25.20				
42	25.70				
43	26.20				
44	26.70				
45	27.20				
46	27.70				
47	28.20				
48	28.70				
49	29.20				
50	29.70				
51	30.20				
52	30.70				
53	31.20				
54	31.70				
55	32.20				
56	32.70				
57	33.20				
58	33.70				
59	34.20	56±0.30	56.4	26.2±0.15	52.4
60	34.70				

conectonic

TOLERANCE:	PROJECTON		TITLE:
Angles $\pm 3^\circ$	DATE	06-22-15'	FPC 0.5Pitch H=2.00mm Horizontal, Lower Contact
X.X ± 0.30	DRAWN	LZH	PART NO:
X.XX ± 0.20	CHECKED		ISF3853F-AAA-33UB
X.XXX ± 0.10	APPROVED		REV: A UNIT: mm SCALE: 2:1 SIZE: A4