
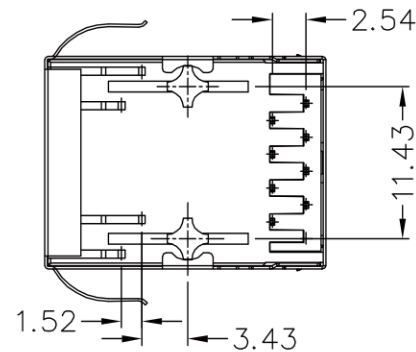
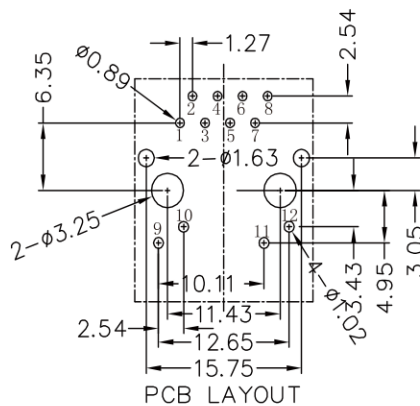



RoHS compliant

REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

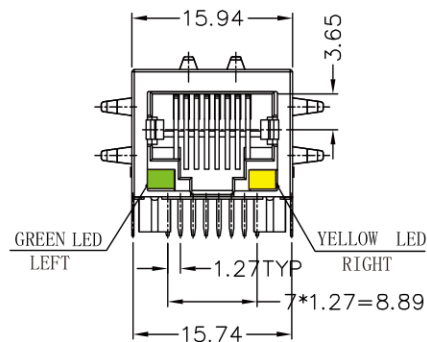

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss:	1-30MHZ	-16.0dB MIN
	30-60MHZ	-14.0dB MIN
	60-80MHZ	-10.0dB MIN

Cross Talk:	1-30MHZ	-40.0dB MIN
	30-60MHZ	-35.0dB MIN
	60-80MHZ	-30.0dB MIN

CMR: 1M-100MHZ -35dB MIN

Hi-Pot: 1500v AC 6S 1mA


Turn Ratio: 1CT:1CT+/-3%

OCL:350uH MIN @ 100KHZ 100mV 8mA DC

Contacts: 0.35mm thick phos bronze plated with 6u' gold in contact are

Housing Material:PBT Black

Operating temperature range: 0°C-+70°C

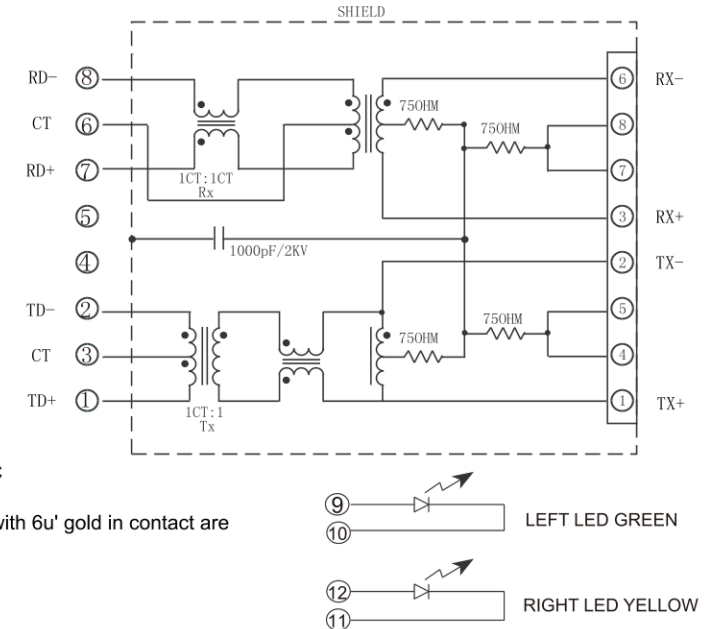

conectonic 

TOLERANCE: XXX ±0.13 XX ±0.20 X ±0.30	PROJECTON		TITLE: 100 Base 1*1 Tab-Down RJ 45			
	DATE	02-20-10'	PART NO: UM-343FQO			
	DRAWN	LYD				
	CHECKED					
	APPROVED					
		REV: A	UNIT: mm	SCALE: 2:1	SIZE: A4	